



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number: **0 580 389 B1**

⑫

EUROPEAN PATENT SPECIFICATION

- ④⑤ Date of publication of patent specification: 20.09.95 ⑤① Int. Cl.⁸: **F01N 3/08**, B01D 53/60,
F01N 9/00, F01N 3/18
- ②① Application number: 93305656.6
- ②② Date of filing: 19.07.93

⑤④ Exhaust gas purification apparatus for an internal combustion engine.

③① Priority: 24.07.92 JP 198224/92
30.06.93 JP 162778/93

④③ Date of publication of application:
26.01.94 Bulletin 94/04

④⑤ Publication of the grant of the patent:
20.09.95 Bulletin 95/38

⑥④ Designated Contracting States:
DE FR GB

⑥⑥ References cited:
EP-A- 0 492 989
WO-A-93/07363
US-A- 4 843 056

PATENT ABSTRACTS OF JAPAN vol. 013, no.
211 (C-597) 17 May 1989 & JP-A-10 30 643
(MATSUSHITA)

⑦③ Proprietor: TOYOTA JIDOSHA KABUSHIKI
KAISHA
1, Toyota-cho
Toyota-shi
Aichi-ken 471 (JP)

⑦② Inventor: Katoh, Kenji

c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)
Inventor: Takeshima, Shinichi
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)
Inventor: Tanaka, Toshiaki
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)
Inventor: Iguchi, Satoshi
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)
Inventor: Goto, Masato
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 580 389 B1

EP 0 580 389 B1

Inventor: Kihara, Tetsuro
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)

Inventor: Asanuma, Takamitsu
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)

Inventor: Murakami, Fumitada
c/o Toyota Jidosha Kabushiki Kaisha,
1 Toyota-cho
Toyota-shi,
Aichi-ken, 471 (JP)

⑦⁴ Representative: Ben-Nathan, Laurence Albert
Urquhart-Dykes & Lord
91 Wimpole Street
London W1M 8AH (GB)

1

EP 0 580 389 B1

2

Description

The present invention relates to an exhaust gas purification apparatus for an internal combustion engine installing an NOx (nitrogen oxides) absorbent in an exhaust conduit of the engine, and particularly relates to an exhaust gas purification apparatus capable of recovering an NOx absorbent poisoned by sulfur oxides (SOx).

Internal combustion engines capable of fuel combustion at lean air-fuel ratios (lean burn engines) have been noted as engines which can both improve fuel economy and suppress the exhaust of CO₂. However, since a conventional catalyst (three-way catalyst) cannot purify NOx in exhaust gas from an engine operated at lean air-fuel ratios (that is, in exhaust gas including excess oxygen), catalysts or systems that can suppress the exhaust of NOx into the atmosphere even at lean air-fuel ratios are desired.

For example, JP-A-5-302,508 (not prepublished) proposes an exhaust gas purification apparatus wherein an NOx absorbent including lanthanum (La), which is one kind of rare-earth, and platinum (Pt) is installed in an engine exhaust conduit. In the apparatus, NOx is absorbed by the La during an engine operation at lean air-fuel ratios, and the NOx absorbed by the La is released from the La at an engine operation at a stoichiometric or rich air-fuel ratio and is decomposed (or reduced) into N₂.

However, it has been found in tests executed for developing the present invention that if a high temperature and excess oxygen exhaust gas condition continues for a relatively long time period, the NOx absorption rate of the NOx absorbent decreases.

One reason for such degradation of the NOx absorbent is presumed to be that SOx (for example, SO₂ which is produced from sulfur contained in fuel) is oxidized to sulfate ion (SO₄²⁻), which is diffused into and is absorbed by the NOx absorbent to form an obstinate sulfate which obstructs the absorption of NOx by the NOx absorbent.

An object of the invention is to provide an exhaust gas purification apparatus for an internal combustion engine installing an NOx absorbent in an engine exhaust conduit wherein the NOx absorbent poisoned by SOx is recovered to a nearly original non-poisoned state by controlling an operation of the engine.

The above-described object is achieved by an exhaust gas purification apparatus for an internal combustion engine in accordance with the present invention. The present invention is directed to an internal combustion engine capable of fuel combustion at lean air-fuel ratios and an exhaust conduit connected to the engine, an NOx absorbent installed in the exhaust conduit, including at least

one kind of element selected from the group consisting of alkaline earth, rare-earth, and alkaline metals or an oxide of the element, wherein the NOx absorbent absorbs NOx in exhaust gas including excess oxygen and releases the NOx which the NOx absorbent has absorbed when an oxygen concentration of the exhaust gas decreases. The apparatus further includes operating condition detecting means for detecting an operating condition of the engine, operating condition determining means for determining whether the exhaust gas from the engine is in a condition wherein the exhaust gas includes excess oxygen and wherein the exhaust gas or NOx absorbent temperature is high, and exhaust gas oxygen concentration control means for decreasing the oxygen concentration of the exhaust gas flowing to the NOx absorbent when the operating condition determining means determines that the exhaust gas is in a condition wherein the exhaust gas includes excess oxygen and wherein the exhaust gas or NOx absorbent temperature is high.

In tests conducted for developing the invention, the following facts were found: When the exhaust gas included excess oxygen (exhaust gas from the engine operated at lean air-fuel ratios) and when the exhaust gas or NOx absorbent temperatures were high (for example, higher than 550°C in exhaust gas temperature), sulfate (for example, BaSO₄) was formed in the NOx absorbent carrying barium (Ba, one kind of alkaline earth) and the NOx absorbent was poisoned by SOx (SOx-poisoned). When the SOx-poisoned NOx absorbent was burnt in air at about 1100°C, the sulfate was decomposed to SO₂, and the SO₂ in the form of gas was released from the NOx absorbent, so that the NOx absorbent was recovered nearly to an original, non-poisoned state. When the SOx-poisoned catalyst was burnt in decompressed air, the sulfate was decomposed and the NOx absorbent was recovered even at about 900°C. Further, in a reducing gas condition (which corresponds to exhaust gas containing no oxygen but reducing materials such as hydrocarbons, and corresponds to, for example, exhaust gas from an engine operated at lean-air fuel ratios), the sulfate was decomposed and the NOx absorbent was recovered even at about 550°C in exhaust gas temperature.

The above-found facts are used in the apparatus of the invention for recovering the NOx absorbent installed in the engine exhaust conduit from the SOx-poisoning thereof. More particularly, when the operating condition determining means determines that the engine exhaust gas is in a condition of excess oxygen and the engine exhaust or NOx absorbent temperature is high, the oxygen concentration control means decreases the oxygen

3

EP 0 580 389 B1

4

concentration of the exhaust gas repeatedly or continuously. When the oxygen concentration decreases, the sulfate formed in the NOx absorbent is decomposed and is released from the NOx absorbent so that the NOx absorbent is recovered.

The above-described object and other objects, features, and advantages of the present invention will become more apparent and will be more readily appreciated from the following detailed description of the preferred embodiments of the invention taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic diagram of an exhaust gas purification apparatus for an internal combustion engine including an NOx absorbent, which is applicable to all embodiments of the invention;

FIG. 2 is a schematic diagram of an exhaust gas purification apparatus wherein an NOx absorbent system includes a combination of an NOx absorbent and a conventional three-way catalyst, which is applicable to all the embodiments of the invention;

FIG. 3 is a diagram illustrating NOx absorption and release mechanisms of the NOx absorbent, which is applicable to all the embodiments of the invention;

FIG. 4 is a diagram illustrating mechanisms of SOx-poisoning and recovery therefrom of the NOx absorbent, which is applicable to all the embodiments of the invention;

FIG. 5 is a flow chart of a control routine of an operating condition determining means in accordance with a first embodiment of the invention;

FIG. 6 is a flow chart of a flag control for repetition of lean and rich air-fuel ratio operations in accordance with the first embodiment of the invention;

FIG. 7 is a flow chart of a control routine of a rich air-fuel ratio condition repeatedly producing means in accordance with the first embodiment of the invention;

FIG. 8 is a flow chart of a schematic fuel injection control routine in accordance with the first embodiment of the invention;

FIG. 9 is a control flow chart of an exhaust gas purification apparatus in accordance with a second embodiment of the invention;

FIG. 10 is a control flow chart of an exhaust gas purification apparatus in accordance with a third embodiment of the invention;

FIG. 11 is a control flow chart of an exhaust gas purification apparatus in accordance with a fourth embodiment of the invention;

FIG. 12 is a control flow chart of an exhaust gas purification apparatus in accordance with a fifth embodiment of the invention;

FIG. 13 is a control flow chart of an exhaust gas purification apparatus in accordance with a sixth

embodiment of the invention;

FIG. 14 is a control flow chart of an exhaust gas purification apparatus in accordance with a seventh embodiment of the invention;

FIG. 15 is a control flow chart of an exhaust gas purification apparatus in accordance with an eighth embodiment of the invention;

FIG. 16 is a control flow chart of an exhaust gas purification apparatus in accordance with a ninth embodiment of the invention; and

FIG. 17 is a control flow chart of an exhaust gas purification apparatus in accordance with a tenth embodiment of the invention.

Preferred embodiments of the invention will be explained below with reference to drawings.

Firstly, structures common to all embodiments of the invention will be explained with reference to FIGS. 1-4. As illustrated in FIG. 1, in an exhaust conduit 4 connected to an internal combustion engine 2 capable of fuel combustion at lean air-fuel ratios, an NOx absorbent 6 is installed which absorbs nitrogen oxides (NOx) in exhaust gas including excess oxygen and releases the NOx which the absorbent has absorbed when an oxygen concentration of the exhaust gas decreases.

The NOx absorbent 6 includes a carrier 6c of, for example, alumina (Al_2O_3) and at least one element 6b selected from the group consisting of (a) noble metal catalyst 6a having oxidizing and reducing abilities, for example platinum (Pt) and a mixture of platinum and rhodium (Rh), (b) alkaline earth, for example barium (Ba), (c) rare-earth, for example lanthanum (La), and (d) alkaline metal, for example potassium (K), or an oxide of the element, each carried by the carrier 6c. The above-described element 6b carried by the carrier 6c may be replaced by a transition metal, for example copper (Cu).

The NOx absorbent 6 of FIG. 1 may be replaced, as illustrated in FIG. 2, by a combination of an NOx absorbent 6A having a weak catalytic ability and a conventional, three-way catalyst 6B disposed downstream of the NOx absorbent 6A. The NOx absorbent 6A may be constructed of, for example, a double oxide of (a) transition metal (for example, Cu) and (b) alkaline earth, rare-earth, or alkaline metal each having an NOx absorbing ability. Such absorbent 6A includes, for example, a Ba-Cu-O base absorbent.

NOx absorption and release mechanisms of the NOx absorbent 6 are illustrated in FIG. 3. More particularly, in an excess oxygen exhaust gas condition, NO and O_2 react with each other at a surface of Pt to form NO_2 , which is diffused into the Ba layer (more exactly, the layer of $\text{Ba}(\text{OH})_2$, BaO) in the form of NO_3^- so that NOx is absorbed by the Ba layer. In this instance, since NO has been oxidized to the form of NO_2 , the NOx can

5

EP 0 580 389 B1

6

easily react with Ba to be easily absorbed by the Ba layer. When the oxygen concentration of the exhaust gas decreases, the NO_3^- which has been absorbed in the Ba layer is released from the Ba layer and is changed to the form of NO_2 . The NO_2 is then reduced to N_2 by the reducing materials such as HC and CO contained in the exhaust gas at the surface of Pt.

SOx-poisoning and recovery mechanisms of the NOx absorbent are illustrated in FIG. 4. As illustrated in the left half portion of FIG. 4, SOx in the exhaust gas (for example, SO_2) is oxidized to SO_3^- and then to SO_4^{2-} on the surface of Pt and the sulfate ion is diffused into the Ba layer to form sulfate (for example, BaSO_4). Since the sulfate grows unlikely to be decomposed with the lapse of time, the sulfate should be decomposed within a relatively short time period by decreasing the oxygen concentration of the exhaust gas, for example, by changing the air-fuel ratio to a rich air-fuel ratio. When the oxygen concentration of the exhaust gas decreases, as illustrated in the right half portion of FIG. 4, the sulfate is decomposed to a sulfate ion in the vicinity of Pt, which is in turn reduced to SO_2 . The SO_2 is gas and is easily released from the Ba layer. By producing the oxygen concentration decreased condition repeatedly or continuously within a relatively short period of time, SOx-poisoning of the NOx absorbent 6 can be suppressed. For example, in a case of repeatedly producing the oxygen concentration decreased condition, an operation mode wherein the engine is operated at lean air-fuel ratios for about two minutes and then operated at rich air-fuel ratios for about one half (1/2) to three (3) seconds is repeated. In this instance, when the exhaust gas or NOx absorbent temperature is high, the time period wherein the rich air-fuel ratio is maintained can be shortened.

For conducting the recovery control from the SOx-poisoning of the NOx absorbent, various sensors and devices are provided. More particularly, exhaust gas sensors 10 and 10A are disposed in the exhaust conduit 4 upstream and downstream of the NOx absorbent 6, respectively, for the purpose of detecting the current exhaust gas temperature T_e and the current NOx absorbent temperature. For the purpose of detecting the current engine operating condition, an engine load sensor (for example, an intake pressure sensor) 12 and an engine speed sensor 14 are provided. The engine speed N_e may be calculated from the output of a crank angle sensor housed in a distributor. These sensors 10, 12 and 14 constitute an operating condition detecting means for detecting the current engine operating condition. The outputs of these sensors 10, 12 and 14 are fed to an electronic control unit (ECU) 8.

The ECU 8 may be constituted of a micro computer. As with a conventional micro computer, the ECU 8 preferably includes input and output interfaces, a read-only memory (ROM), a random access memory (RAM) for storing data temporally, and a central processor unit (CPU) for conducting calculation. The ECU may further include an analog/digital convertor which converts analog signals to digital signals when the fed signals are analog ones. Instruction signals which are the results of calculation at the CPU are sent from the output interface to an exhaust gas oxygen concentration control means 16 to control the oxygen concentration of the exhaust gas. The exhaust gas oxygen concentration control means 16 includes, for example, an electronic control fuel injection valve which can control the air-fuel ratio by controlling an injection amount of fuel. For reference, the oxygen concentration of exhaust gas is 0.3-0.5% at the stoichiometric air-fuel ratio, about 4% at the air-fuel ratio of 18, and 7-7.5% at the air-fuel ratios of 22-23. Usually, lean burn engines can be operated at air-fuel ratios above 22.

Structures and operation specific to each embodiment will now be explained.

FIGS. 5-8 illustrate the first embodiment of the invention wherein an oxygen concentration of exhaust gas is decreased repeatedly when the exhaust gas is in a condition of excess oxygen and high temperature.

Control routines as shown in FIGS. 5, 6 and 7 are provided for recovering an SOx-poisoned NOx absorbent 6. The control routines are stored in the ROM and called by the CPU where calculations are conducted in the order of calculations of FIGS. 5, 6, and 7. The routine of FIG. 5 constitutes an operating condition determining means of the first embodiment of the invention for determining whether or not the current exhaust gas condition is in a condition of excess oxygen and high temperature, and the routine of FIG. 7 constitutes an exhaust gas oxygen concentration control means of the first embodiment of the invention for decreasing the oxygen concentration of exhaust gas when the current exhaust gas condition is in a condition of excess oxygen and the exhaust gas or NOx absorbent temperature is high. This control means includes means for repeatedly producing a rich air-fuel-ratio for controlling fuel injection so that the air-fuel ratio is repeatedly changed to a rich ratio.

The control routine of FIG. 5 is entered at predetermined time intervals. The routine of FIG. 5 is entered at step 100. Then, at step 102, the current engine operating conditions including an engine load P , an engine speed N_e , and an exhaust gas temperature T_e are entered. An output of the exhaust gas temperature sensor 10 is used for the exhaust gas temperature. The exhaust gas tem-

7

EP 0 580 389 B1

8

perature may be presumed from a map which stores the relationship between T_e and P , N_e obtained tests. In a conventional fuel injection control, a fuel injection amount is determined based on P and N_e , and thus the air-fuel ratio has been determined before the routine proceeds to step 102.

Then, at step 104, a decision is made as to whether or not the current air-fuel ratio is lean (that is, greater than 14.7 in air-fuel ratio). If the air-fuel ratio is lean, the routine proceeds to step 106, where a decision is made as to whether or not the current exhaust gas temperature T_e (or NO_x exhaust gas temperature) is equal to or higher than a predetermined temperature (for example, $550^\circ C$ in exhaust gas temperature and $500^\circ C$ in NO_x absorbent temperature). When the exhaust gas temperature is high, the current condition is deemed to be a condition in which the air-fuel ratio is controlled so that it repeatedly becomes rich and then lean thereby recovering the SO_x -poisoned NO_x absorbent, and the routine proceeds to step 108 where the lean and rich repeated control flag LRFLAG is set to "1". Then, the routine proceeds to step 112 where the cycle ends. When the exhaust gas is not in a condition of a lean air-fuel ratio and high temperature, the current operating condition is deemed to be a condition in which no recovery control of the NO_x absorbent is to be conducted, and the routine proceeds to step 110 where flag LRFLAG is cleared to "0". Then, the routine proceeds to step 112 and the cycle ends.

The routine of FIG. 6 is a routine for conducting a flag control for the lean and rich air-fuel ratio repeated control. The routine is entered at step 120. Then, at step 122, a decision is made as to whether or not the lean and rich repeated control flag LRFLAG is set at "1". If LRFLAG is not at "1", the current condition is not in a condition where the lean and rich repeated control for recovery of the NO_x absorbent is to be conducted, and therefore the routine proceeds to step 138 and returns.

If LRFLAG is set at "1" at step 122, the routine proceeds to step 124. Then, a flag control is conducted so that the engine is operated at lean air-fuel ratios for a first predetermined time period and then at rich air-fuel ratios for a second predetermined time period and the lean and rich operations are repeated. More particularly, at step 124, a decision is made as to whether or not lean flag is set at "1" (this means, rich flag is set at "0"). If lean flag is set at "1", the routine proceeds to step 126 where the lean operation time period is counted by, for example, adding a time interval of entering the routine (Δt) to the counted lean operation period (SLP) of the previous cycle. Then, at step 128, a decision is made as to whether or not the accumulated lean operation period (SLP) exceeds a first predetermined period (for example,

two minutes). If SLP does not exceed the first period, the current engine operating condition is a condition where the lean operation is to be maintained, and the routine proceeds to step 138 where the cycle ends. If SLP exceeds the first period, the routine proceeds to step 130 where rich flag is set to "1" (this means that lean flag is set to "0"), and then the routine proceeds to step 138 and returns. By this procedure, lean flag is set at "1" (rich flag is set at "1") for the first period.

If lean flag is not set at "1" (rich flag is not set at "0"), the routine proceeds to step 132 where the rich operation time period (SRP) is counted by, for example, adding the interval (Δt) to the counted rich operation period of the previous cycle. Then, at step 134, a decision is made as to whether or not the accumulated rich operation period (SRP) exceeds a second predetermined time period (for example, 3 seconds). If SRP does not exceed the second period, the rich operation should be maintained, and therefore the routine proceeds to step 138 where the cycle ends. If SRP exceeds the second period, the routine proceeds to step 136, where lean flag is set to "1" (this means that rich flag is set to "0"), and then the routine proceeds to step 138 and returns. By this procedure, rich flag is set at "1" (lean flag is set at "0") for the second period.

Then, the routine of FIG. 7 is entered at step 140. Then, at step 142, a decision is made as to whether or not the lean and rich repeated control flag LRFLAG is set at "1", that is, whether or not the current condition is in a condition where the recovering control of the SO_x -poisoned NO_x absorbent should be conducted. If flag LRFLAG is set at "1" at step 142, the routine proceeds to step 144 where a decision is made as to whether or not rich flag is set at "1" (this means that lean flag is set at "0"). If rich flag is "1", the routine proceeds to step 146 where a rich air-fuel ratio operation is conducted, and then proceeds to step 150 where the cycle ends. The rich air-fuel ratio control at step 146 is executed by setting a rich control flag RCON (see FIG. 8) at "1". If LRFLAG is not "1" and if rich flag is not "1", the routine proceeds to step 148, where flag RCON is set at "0" and then proceeds to step 150 where the cycle ends.

FIG. 8 illustrates a fuel injection control routine which is entered after the routine of FIG. 7, which includes added steps 170 and 172. More particularly, the routine is entered at step 160. Then, at step 162, the current engine load P and the current engine speed N_e are entered. Then, at step 164, a basic fuel injection amount TP is determined based on the entered P and N_e . At step 166, various modification factors are determined. Then, at step 168, fuel injection time period TAU is determined from the following equation:

9

EP 0 580 389 B1

10

$$\text{TAU} = \alpha \cdot \text{TP} \cdot (1 + K)$$

Then, the routine proceeds to step 170 where a decision is made as to whether flag RCON determined at steps 146 and 148 of FIG. 7 is "0" or not. If RCON is "0", the fuel injection control is normal and therefore the routine proceeds to step 174, where TAU is set and fuel injection is conducted for the period of TAU. Then, the routine proceeds to step 176 where the cycle ends. If flag RCON is "1" at step 170, the routine proceeds to step 172 where TAU is changed to TAUR (a fuel injection period for making the air-fuel ratio rich) despite the calculation at step 168. Then, the routine proceeds to step 174, where TAU of TAUR is set. Then, the routine proceeds to step 176 where the cycle ends. In this way, the rich air-fuel control of step 146 of FIG. 7 is conducted.

Operation of the first embodiment of the invention will now be explained. NOx included in exhaust gas is absorbed by the NOx absorbent 6, so that the amount of NOx exhausted to the atmosphere is suppressed. However, the NOx absorption ability of the NOx absorbent 6 may gradually decrease due to SOx-poisoning when it is used for a long time period. For the purpose of recovering the SOx-poisoned NOx absorbent, the exhaust gas condition of excess oxygen and high temperature (for example, higher than 550 °C) is detected.

In such an exhaust gas condition, recovery of the NOx absorbent 6 is possible. So, the lean and rich air-fuel ratio repeated control is executed wherein a lean air-fuel ratio operation is conducted for a first period (for example, two minutes) and then a rich air-fuel ratio operation is conducted for a second period (for example, three seconds). In the rich air-fuel ratio operation, the NOx absorbent is recovered according to the mechanism shown in the right half portion of FIG. 4.

The reason why recovery of the NOx absorbent is conducted at temperatures higher than the predetermined temperature (550 °C in exhaust gas temperature and 500 °C in NOx absorbent temperature) is that absorption of NOx is promoted more than generation of sulfate due to SOx so that the NOx absorbent is little SOx-poisoned at that temperature range.

The reason why the rich air-fuel ratio operation is introduced before a relatively long period has elapsed is to recover the NOx absorbent before the SOx-poisoning proceeds to the interior of the NOx absorbent, that is, while only the surface portion of the NOx absorbent is SOx-poisoned, so that recovery is easy. If sulfate ions diffuse to the interior of the absorbent to form sulfate and the state is maintained for a long period of time, recovery of the NOx absorbent from the SOx-degradation is

difficult.

FIG. 9 illustrates the second embodiment of the invention wherein the oxygen concentration of exhaust gas is maintained at a decreased state continuously for a certain period of time when it is detected that the exhaust gas is in an excess oxygen condition and the exhaust gas or NOx absorbent temperature is high (higher than 550 °C in exhaust gas temperature and 550 °C in NOx absorbent temperature). By the decrease in the excess oxygen, the NOx absorbent is unlikely to be SOx-poisoned and is recovered from an SOx-poisoned state even if it is poisoned.

More particularly, the routine of FIG. 9 is entered at step 200. Then, at step 202, the current engine operating conditions including an engine speed and an engine load are entered. At step 204, a current objective air-fuel ratio is determined based on the entered engine operating conditions. In a conventional air-fuel ratio control, the routine proceeds from step 204 to step 212 where fuel injection is conducted. However, in the second embodiment of the invention, steps 206, 208 and 210 are added. More particularly, the routine proceeds from step 204 to step 206 where the current NOx absorbent temperature (or exhaust gas temperature) is entered. Then, at step 208, a decision is made as to whether the oxygen concentration of the exhaust gas is high and the NOx absorbent temperature is high (for example, higher than 500 °C). Step 208 constitutes an operating condition determining means of the second embodiment of the invention. If the exhaust gas is in an excess oxygen condition and the NOx absorbent temperature is high, the routine proceeds to step 210 where the objective air-fuel ratio is changed from the ratio determined at step 204 to a stoichiometric air-fuel ratio. By this procedure, the oxygen concentration of exhaust gas is decreased continuously for a certain time period so that the NOx absorbent is unlikely to be SOx-poisoned. Step 210 constitutes an exhaust gas oxygen concentration continuously decreasing means of the second embodiment of the invention.

FIG. 10 illustrates the third embodiment of the invention.

In a conventional air-fuel ratio control, fuel cutting is conducted in a deceleration time so as to improve fuel efficiency. However, if fuel cutting of deceleration is conducted in a high temperature condition higher than 550 °C in exhaust gas temperature or higher than 500 °C in NOx absorbent temperature, SOx-poisoning of the NOx absorbent 6 is promoted in the fuel cut, excess oxygen gas condition. For the purpose of preventing the SOx-poisoning, in the third embodiment of the invention, fuel cutting of deceleration is ceased in such a high temperature condition. For ceasing fuel cutting in

11

EP 0 580 389 B1

12

the high temperature condition, as illustrated in FIG. 10, steps 302 and 304 are added to the routine of FIG. 9.

At step 302, a decision is made as to whether or not the current engine operating condition is in a condition where fuel cutting is to be conducted, for example whether or not the engine operating condition is in deceleration. If the engine operating condition is not in a condition where fuel cutting is to be conducted, the routine proceeds to step 212, and if the engine operating condition is in a condition where fuel cutting is to be conducted, the routine proceeds to step 304 where the fuel cutting is ceased and fuel cut flag is cleared. Then, the routine proceeds to step 212. By this procedure, in the condition that fuel cutting is to be conducted and the NOx absorbent temperature is high, fuel cutting is ceased so that SOx-poisoning of the NOx absorbent is suppressed. Other structures and operation of the third embodiment of the invention are the same as those of the second embodiment of the invention. Steps 302 and 304 constitutes a fuel-cutting ceasing means of the third embodiment of the invention.

FIG. 11 illustrates the fourth embodiment of the invention. It has been found in tests for developing the invention that the NOx absorbent is SOx-poisoned only in a certain high temperature range, more particularly, in an exhaust gas temperature range of about 550°C-750°C (in an NOx absorbent temperature range of about 500°C-700°C). Degradation of the NOx absorbent due to SOx is not promoted at NOx absorbent temperatures higher than 700°C. Thus, in the fourth embodiment of the invention, the exhaust gas oxygen concentration control means decreases the oxygen concentration only when it is found that the current exhaust gas temperature (or NOx absorbent temperature) is within the above-described temperature range so that the fuel economy of the engine is improved.

For the purpose of conducting the control, as illustrated in FIG. 11, steps 402 and 404 are added to the control routine of the third embodiment of the invention (the routine of FIG. 10). At steps 402 and 404, a decision is made as to whether or not the current exhaust gas temperature is within the range of 500°C-700°C (or the NOx absorbent temperature is within the range of 550°C-750°C). Only when the temperature is within the range, the routine proceeds to step 210 where the oxygen concentration is decreased. In this instance, steps 402 and 404 constitute an operating condition determining means of the fourth embodiment of the invention. Other structures and operation of the fourth embodiment of the invention are the same as those of the third embodiment of the invention.

FIG. 12 illustrates the fifth embodiment of the invention. As discussed above, degradation of the

NOx absorbent due to SOx in an excess oxygen gas condition is promoted only when the exhaust gas or NOx absorbent temperature is within a certain temperature range. Thus, when it is found that the NOx absorbent temperature is in the temperature range, the NOx absorbent temperature is increased to a temperature above that temperature range so that SOx-poisoning of the NOx absorbent is not promoted. In the fifth embodiment of the invention, when it is found that the exhaust gas or NOx absorbent temperature is in the temperature range, the ignition timing of the engine is delayed so that the exhaust gas or NOx absorbent temperature is increased to a temperature above the temperature range.

More particularly, in FIG. 12 which includes steps 502, 504, 506 and 508 added to the routine of FIG. 9, the routine proceeds from step 204 to step 502 where the current objective ignition timing is determined based on the current engine operating condition. From steps 208 and 210, the routine proceeds to 504 where it is determined whether or not the NOx absorbent temperature is lower than 700°C. If the NOx absorbent temperature is not lower than 700°C, the routine proceeds to step 212. If the NOx absorbent temperature is lower than 700°C, the routine proceeds to step 506 where the objective ignition timing is delayed and then the routine proceeds to step 212. From step 212, the routine proceeds to step 508 where ignition in accordance with the objective ignition timing is conducted. Then, the routine proceeds to step 214. In this instance, steps 208 and 504 constitute an operating condition determining means of the fifth embodiment of the invention which determines whether or not the current NOx absorbent or exhaust gas temperature is high and within the predetermined temperature range. Steps 210, 506 and 508 constitute an exhaust gas oxygen concentration control means of the fifth embodiment of the invention which increases the NOx absorbent temperature to a temperature above the predetermined temperature range when it is found that the NOx absorbent temperature is in the temperature range.

FIG. 13 illustrates the sixth embodiment of the invention. In the first through fifth embodiments of the invention, there is a need to provide a temperature sensor to detect the exhaust gas or NOx absorbent temperature, or there is a need to presume the exhaust gas or NOx absorbent temperature based on the engine speed and engine load. Provision of the temperature sensor is accompanied by an increase in cost of the apparatus. The sixth embodiment of the invention aims to presume the exhaust gas or NOx absorbent temperature based on a vehicle speed without installing a temperature sensor. Therefore, an operating condition detecting means of the sixth embodiment includes

13

EP 0 580 389 B1

14

a vehicle speed sensor 18 (see FIGS. 1 and 2). In this instance, the higher the vehicle speed, the higher the exhaust gas or NOx absorbent temperature is. The vehicle speed corresponding to the exhaust gas temperature 550°C is about 100 Km/h.

More particularly, in FIG. 13, the routine proceeds to from step 204 to step 602 where a decision is made as to whether or not the current vehicle speed exceeds the predetermined vehicle speed (for example, 100 Km/h). If the current vehicle speed exceeds the predetermined vehicle speed, the exhaust gas temperature is presumed to be high, and the routine proceeds to step 210. At step 210, the objective air-fuel ratio is changed to a stoichiometric air-fuel ratio, and then the routine proceeds to step 212. If the predetermined vehicle speed does not exceed the predetermined vehicle speed at step 602, the routine proceeds directly to step 212. Step 602 constitutes an operating condition determining means of the sixth embodiment of the invention. Other structures and operation of the sixth embodiment of the invention are the same as those of the second embodiment of the invention.

FIG. 14 illustrates the seventh embodiment of the invention. When a low engine speed and low engine load operation continues for a long time period such as when a vehicle is running on a town street, the NOx absorbent temperature continues to be low and does not reach the switching temperature (550°C in exhaust gas temperature and 500°C in NOx absorbent temperature) at which the air-fuel ratio is to be switched from the lean air-ratio to a rich air-ratio. As a result, SOx-poisoning of the NOx absorbent will be gradually promoted. In this instance, even at low temperatures, the NOx absorbent is poisoned though the poisoning is very slow. It was found in tests conducted in developing the present invention that when the NOx absorbent is poisoned by SOx at certain temperatures in an excess oxygen exhaust gas condition, the sulfur component (SO₂) will be released from the NOx absorbent if the SOx-poisoned NOx absorbent is heated at a temperature a little higher than the temperature at which the NOx absorbent has been SOx-poisoned, and the NOx absorbent will be recovered. In case where the NOx absorbent is poisoned by SOx at relatively low temperatures, the reference temperature for determining whether or not the air-fuel ratio is to be switched to a rich air-fuel ratio can be set at a low temperature. In contrast, when a high temperature (for example, 500°C in NOx absorbent temperature) and lean air-fuel ratio operation continues for a relatively long time, the NOx absorbent temperature should be increased to a temperature (for example, 600°C) higher than the high temperature to re-

cover the NOx absorbent, and thus the reference temperature for determining whether the air-fuel ratio is to be switched to a rich ratio should be set at a high temperature. In the seventh embodiment of the invention, to make an appropriate switching, the reference temperature for determining the switching timing is changed in accordance with the history of the temperatures that the NOx absorbent has experienced at lean air-fuel ratio operation.

More particularly, as illustrated in FIG. 14, step 208 of FIG. 9 is replaced by steps 702-708 in FIG. 14. The routine proceeds from step 206 to step 702 where a decision is made as to whether or not the current objective air-fuel ratio is lean. If the current operation is not a lean air-fuel ratio operation, the routine proceeds to step 706, and if the current operation is a lean air-fuel ratio operation, the routine proceeds to step 704 where an average absorbent temperature at the lean air-fuel operation is calculated. For example, if the average absorbent temperature of the past ten seconds is 400°C and the current absorbent temperature of one second is 450°C, the average absorbent temperature is 404°C, calculated from equation: $(400 \times 10 + 450 \times 1)/11 = 404$. Then, at step 706, a reference temperature T_0 for determining whether the engine operation is to be switched from a lean air-fuel ratio operation to a rich air-fuel ratio operation is obtained in accordance with the average temperature Have based on a map shown in FIG. 14. In the map, the relationship between T_0 and T_{ave} is predetermined such that in the vicinity of 500°, the higher T_{ave} , the higher T_0 is. Then, the routine proceeds to step 708 where a decision is made as to whether or not the current NOx absorbent temperature T_a is higher than the reference temperature T_0 . If T_a is not higher than T_0 , the routine proceeds to step 212, and if T_a is higher than T_0 , the condition is deemed to be in a lean air-fuel ratio condition and the routine proceeds to step 210 where the air-fuel ratio is changed from a lean air-fuel ratio to a rich air-fuel ratio so that the oxygen concentration of the exhaust gas is decreased. Other structures and operation of the seventh embodiment of the invention are the same as those of the second embodiment of the invention.

FIG. 15 illustrates the eighth embodiment of the invention. The condition where recovery of the SOx-poisoned NOx absorbent is conducted should be limited to the condition where the exhaust gas includes excess oxygen and where the exhaust gas or NOx absorbent temperature is high, for improving the fuel economy. Since the NOx absorbent has a large heat capacity, when the NOx absorbent temperature rises above 500°C, the NOx absorbent temperature will not immediately decrease in response to a decrease in the exhaust gas temperature though the exhaust gas temperature de-

15

EP 0 580 389 B1

16

creases to a temperature lower than 500°C . As a result, switching from the stoichiometric or rich air-fuel ratio to a lean air-fuel ratio is delayed, and fuel economy decreases. To prevent this delay in switching the air-fuel ratio, in the eighth embodiment of the invention, a switching temperature from a stoichiometric or rich air-fuel ratio to a lean air-fuel ratio is set lower than a switching temperature from a lean air-fuel ratio to a stoichiometric or rich air-fuel ratio, for example set lower by 50°C than a maximum NOx absorbent temperature, so that the engine operation can easily return to a lean air-fuel ratio operation.

More particularly, as illustrated in FIG. 15, steps 802-814 are added to the routine of FIG. 9. The routine proceeds from step 206 to step 802 and then to 804 so that a maximum NOx absorbent temperature T_{max} is stored. Then, the routine proceeds to step 806 where a decision is made as to whether the engine is in a rich air-fuel ratio operation referring to rich control flag. If the engine is in a lean air-fuel ratio operation, the routine proceeds to step 208 where a decision is made whether or not the maximum temperature T_{max} which the NOx absorbent has experienced exceeds a switching temperature (for example, 500°C). If T_{max} exceeds the switching temperature, the routine proceeds to step 210 where the air-fuel ratio is changed from the lean ratio to a stoichiometric or rich ratio, and then the routine proceeds to step 814. At step 814, the rich control flag is set and then the routine proceeds to step 212. If T_{max} is equal to or lower than 500°C at step 208, it is deemed that the lean air-fuel operation may be continued, and the routine proceeds to step 812. At step 812, the rich control flag is reset (lean control flag is set), and the routine proceeds to step 212.

At the next cycle, after passing through step 814, the routine proceeds from step 806 to 808 so that the stoichiometric or rich air-fuel ratio operation is continued. When the exhaust gas temperature decreases, the NOx absorbent temperature T_a decreases. If it is determined at step 808 that T_a has decreased to a temperature lower than the temperature of $T_{\text{max}}-50^{\circ}\text{C}$, the routine proceeds from step 808 to step 810 where T_{max} is cleared to zero, and the routine proceeds to step 812. At step 812, the rich control flag is reset, and then at step 212 the lean air-fuel ratio operation is continued. If T_a is equal to or higher than the temperature of $T_{\text{max}}-50^{\circ}\text{C}$, the stoichiometric or rich air-fuel operation is continued. By this control, the reference temperature for switching the engine operation from the stoichiometric or rich air-fuel ratio operation to a lean air-fuel ratio operation can be set lower than the reference temperature for switching the engine operation from the lean air-fuel ratio operation to a stoichiometric or rich air-fuel

ratio operation, so that the engine operation can be smoothly returned to a lean air-fuel ratio operation. Other structures and operation of the eighth embodiment of the invention are the same as those of the second embodiment of the invention.

FIG. 16 illustrates the ninth embodiment of the invention. In the ninth embodiment, means (steps 902 and 904) are added to the routine of the eighth embodiment, for returning the rich air-fuel operation to a lean air-fuel ratio operation independently of the NOx absorbent temperature if the rich air-fuel ratio operation continues for a predetermined time period (for example, ten minutes) so that the operation is sure to return to the lean air-fuel ratio operation.

More particularly, if it is determined at step 808 that T_a is higher than $T_{\text{max}}-50^{\circ}\text{C}$ and the rich air-fuel ratio operation is to be continued, the routine proceeds to step 902 where the rich air-fuel operation period is counted. Then, the routine proceeds to step 904 where a decision is made as to whether the counted period exceeds a predetermined period, for example 10 minutes. If the counted period exceeds the predetermined period, the routine proceeds to step 810 and then step 812 where the operation is switched to a lean air-fuel ratio operation. If the counted period does not exceed the predetermined period, it is deemed that the rich air-fuel ratio may be continued, and the routine proceeds to step 210. Other structures and operation of the ninth embodiment of the invention are the same as those of the eighth embodiment of the invention.

FIG. 17 illustrates the tenth embodiment of the invention. As discussed above, since the heat capacity of the NOx absorbent is large, if the oxygen concentration control is conducted based on the NOx absorbent temperature, switching from the rich air-fuel ratio to a lean air-fuel ratio is delayed. This delay will be accompanied by a decrease in fuel economy. Contrarily, since the NOx absorbent inlet temperature alters largely, if the oxygen concentration control is conducted based on the NOx absorbent inlet temperature, the air-fuel ratio may be switched from the lean air-fuel ratio to a rich air-fuel ratio too early. That is also accompanied by a decrease in fuel economy. In order to prevent this, in the tenth embodiment, switching from a lean air-fuel ratio to a stoichiometric or rich air-fuel ratio is conducted based on an NOx absorbent outlet gas temperature and switching from a stoichiometric or rich air-fuel ratio to a lean air-fuel ratio is conducted based on an NOx absorbent inlet gas temperature. Thus, an operating condition detecting means of the tenth embodiment of the invention includes both the inlet gas temperature 10 and an outlet gas temperature 10A (see FIGS. 1 and 2).

17

EP 0 580 389 B1

18

More particularly, as illustrated in FIG. 17, steps 1002-1014 are added to the routine of the second embodiment (FIG. 9). The routine proceeds from step 204 to step 1002 and then to step 1004 where the current inlet gas temperature T_{in} and outlet gas temperature T_{out} of the NOx absorbent are entered. Then, at step 1006, a decision is made referring to the rich control flag as to whether or not the engine is in a stoichiometric or rich air-fuel ratio operation. If the engine is not in a stoichiometric or rich air-fuel ratio operation, the routine proceeds to step 1008 where a decision is made as to whether or not the current NOx absorbent outlet temperature T_{out} exceeds a predetermined temperature (for example, 500°C). If T_{out} exceeds the predetermined temperature, the routine proceeds to step 210 where the engine operation is changed to a stoichiometric operation. Then, the routine proceeds to step 1014 where the rich control flag is set. Then, the routine proceeds to step 212. If T_{out} is equal to or lower than 500°C at step 1008, it is deemed that the lean air-fuel operation may be continued, and the routine proceeds to step 1010 where the rich control flag is reset. Then, the routine proceeds to step 212. If the engine is in a rich air-fuel operation at step 1006, the routine proceeds to step 1012 where a decision is made as to whether the NOx absorbent inlet temperature T_{in} exceeds a predetermined temperature (for example, 400°C). If T_{in} is lower than the predetermined temperature, it is deemed that the lean air-fuel ratio operation may be continued, and the routine proceeds to step 1010. If T_{in} is higher than the predetermined temperature at step 1012, the routine proceeds to step 210 and the stoichiometric or rich air-fuel operation is continued. Other structures and operation of the tenth embodiment of the invention are the same as those of the second embodiment of the invention.

In accordance with the present invention, since the oxygen concentration of exhaust gas is decreased when the exhaust gas is in an excess oxygen condition and the exhaust gas or NOx absorbent temperature is high, the sulfate absorbed in the NOx absorbent is reduced to SO_2 which is easily released from the NOx absorbent so that the SOx-poisoned NOx absorbent is recovered and the durability of the exhaust gas purification apparatus is improved.

Claims

1. An exhaust gas purification apparatus for an internal combustion engine comprising:
an internal combustion engine (2) capable of fuel combustion at lean air-fuel ratios and an exhaust conduit (4) connected to the engine (2);

an NOx absorbent (6, 6A) installed in the exhaust conduit (4) and including at least one element selected from the group consisting of alkaline earth, rare-earth, alkaline metals, and oxides of alkaline earth, rare-earth, and alkaline metals, the NOx absorbent (6, 6A) absorbing NOx included in exhaust gas having excess oxygen therein and releasing the NOx which the NOx absorbent (6, 6A) has absorbed when an oxygen concentration of the exhaust gas decreases; and

operating condition detecting means (10, 10A, 12, 14, 18) for detecting an operating condition of the engine (2), characterized in that said exhaust gas purification apparatus further comprises:

operating condition determining means for determining whether the exhaust gas includes excess oxygen and for determining whether one of an exhaust gas temperature and an NOx absorbent temperature is high; and

exhaust gas oxygen concentration control means for decreasing the oxygen concentration of the exhaust gas flowing into the NOx absorbent (6, 6A) when the operating condition determining means determines that the exhaust gas includes excess oxygen and that one of an exhaust gas temperature and an NOx absorbent temperature is high.

2. An apparatus according to claim 1, further comprising a three-way catalyst (6B) installed in the exhaust conduit (4) downstream of the NOx absorbent (6A).
3. An apparatus according to claim 1, wherein the NOx absorbent (6A) comprises a Ba-Cu-O base absorbent.
4. An apparatus according to claim 1, wherein the operating condition detecting means includes an engine speed sensor (14) and an engine load sensor (12).
5. An apparatus according to claim 1, wherein the operating condition determining means determines that the exhaust gas or NOx absorbent temperature is high when the exhaust gas temperature is higher than 550°C or the NOx absorbent temperature is higher than 500°C .
6. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes means for repeatedly decreasing the exhaust gas oxygen concentration by controlling fuel injection so that the oxygen concentration of the exhaust gas is repeatedly decreased.

19

EP 0 580 389 B1

20

7. An apparatus according to claim 6, wherein the means for repeatedly decreasing the exhaust gas oxygen concentration includes means for controlling the fuel injection so that a sequence of a lean air-fuel ratio operation conducted for a first time period, followed by a rich air-fuel ratio operation conducted for a second time period, is repeated. 5
8. An apparatus according to claim 7, wherein the first time period is about two minutes and the second time period is about three seconds. 10
9. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes means for continuously decreasing exhaust gas oxygen concentration in order to decrease the exhaust gas oxygen concentration and maintain the decreased oxygen concentration for a predetermined time period. 15 20
10. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes a fuel cutting ceasing means for ceasing fuel cutting when the exhaust gas includes excess oxygen and one of the exhaust gas temperature and the NOx absorbent temperature is high. 25 30
11. An apparatus according to claim 10, wherein the condition where fuel cutting is to be conducted is a deceleration condition. 30
12. An apparatus according to claim 1, wherein the operating condition determining means includes means for determining whether one of a current exhaust gas temperature and an NOx absorbent temperature is within a predetermined temperature range, and wherein the exhaust gas oxygen concentration control means decreases the oxygen concentration only when one of the current exhaust gas temperature and the NOx absorbent temperature is within the predetermined temperature range. 35 40 45
13. An apparatus according to claim 12, wherein the predetermined temperature range is a range of 550°C-750°C in exhaust gas temperature and a range of 500°C-700°C in NOx absorbent temperature. 50
14. An apparatus according to claim 1, wherein the operating condition determining means includes means for determining whether one of a current exhaust gas temperature and an NOx absorbent temperature is within a predetermined temperature range, and wherein the exhaust gas oxygen concentration control means includes means for delaying an objective ignition timing when one of the current exhaust gas temperature and the NOx absorbent temperature is within the predetermined temperature range. 55
15. An apparatus according to claim 14, wherein the predetermined temperature range is a range of 550°C-750°C in exhaust gas temperature and a range of 500°C-700°C in NOx absorbent temperature.
16. An apparatus according to claim 1, wherein the operating condition detecting means includes a vehicle speed sensor (18) and wherein the operating condition determining means includes means for determining whether or not an exhaust gas or NOx absorbent temperature is high by determining whether a current vehicle speed detected by the vehicle speed sensor (18) is at least as great as a predetermined speed.
17. An apparatus according to claim 1, wherein the predetermined speed is about 100 Km/h.
18. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes means for modifying a reference temperature for switching an engine operation from a lean air-fuel operation to a rich air-fuel operation so that the higher the temperatures that the NOx absorbent (6, 6A) has experienced, the higher the reference temperature is.
19. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes means for decreasing the exhaust gas oxygen concentration to allow an NOx absorbent temperature to rise when the NOx absorbent temperature exceeds a predetermined temperature, storing a highest temperature that the NOx absorbent experiences, and ceasing the operation of decreasing the exhaust gas oxygen concentration when the NOx absorbent temperature decreases to a temperature lower than the stored highest temperature by a predetermined temperature decrement.
20. An apparatus according to claim 19, wherein the predetermined temperature is about 500°C and the predetermined temperature decrement is about 50°C.

21

EP 0 580 389 B1

22

21. An apparatus according to claim 1, wherein the exhaust gas oxygen concentration control means includes means for ceasing an engine operation at lean air-fuel ratios and for stopping the ceasing of the lean air-fuel ratio operation independently of an NO_x absorbent temperature when a predetermined time period has elapsed since the lean air-fuel operation has ceased.

5

22. An apparatus according to claim 21, wherein the predetermined time period is about ten minutes.

10

23. An apparatus according to claim 1, wherein the operating condition detecting means includes means (10) for detecting an inlet gas temperature of the NO_x absorbent and means (10A) for detecting an outlet gas temperature of the NO_x absorbent (6, 6A), and wherein the exhaust gas oxygen concentration control means includes means for decreasing the exhaust gas oxygen concentration when the outlet gas temperature of the NO_x absorbent (6, 6A) exceeds a first predetermined temperature, and wherein the exhaust gas oxygen concentration decreasing operation is stopped when the inlet gas temperature of the NO_x absorbent (6, 6A) decreases to a temperature below a second predetermined temperature, wherein the second predetermined temperature is lower than the first predetermined temperature.

15

20

25

30

24. An apparatus according to claim 23, wherein the means for detecting an outlet gas temperature of the NO_x absorbent comprises a temperature sensor (10A) installed downstream of the NO_x absorbent (6, 6A).

35

25. An apparatus according to claim 23, wherein the first predetermined temperature is about 500 °C and the second predetermined temperature is about 400 °C.

40

Patentansprüche

45

1. Abgasreinigungsgerät für eine Brennkraftmaschine, mit:

einer Brennkraftmaschine (2), die zur Treibstoffverbrennung bei mageren Luft-Treibstoff-Verhältnissen geeignet ist, und einer mit der Brennkraftmaschine (2) verbundenen Abgasleitung (4);

50

einem in der Abgasleitung (4) angeordneten NO_x-Absorbenten (6, 6A), der zumindest ein Element enthält, das aus der Gruppe ausgewählt wird, die aus Erdalkalien, Seltenen Erden, Alkalimetallen sowie Oxiden von Erdalka-

55

lien, Seltenen Erden und Alkalimetallen besteht, wobei der NO_x-Absorbent (6, 6A) in dem Überschuß-Sauerstoff enthaltenden Abgas enthaltenes NO_x absorbiert, und das NO_x freisetzt, das der NO_x-Absorbent (6, 6A) absorbiert hat, wenn sich die Sauerstoffkonzentration des Abgases verringert; und

eine Betriebszustands-Erfassungseinrichtung (10, 10A, 12, 14, 18) zum Erfassen eines Betriebszustands der Brennkraftmaschine (2),

gekennzeichnet durch:

eine Betriebszustands-Bestimmungseinrichtung zum Bestimmen, ob das Abgas Überschuß-Sauerstoff enthält und zum Bestimmen, ob eine Abgastemperatur und eine NO_x-Absorbiententemperatur hoch ist; und eine Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung zum Verringern der Sauerstoffkonzentration des Abgases, das in den NO_x-Absorbenten (6, 6A) strömt, wenn die Betriebszustands-Bestimmungseinrichtung bestimmt, daß das Abgas Überschuß-Sauerstoff enthält und daß eine Abgastemperatur eine NO_x-Absorbiententemperatur hoch ist.

2. Gerät nach Anspruch 1,

gekennzeichnet durch

einen unterstromig des NO_x-Absorbenten (6A) in der Abgasleitung (4) angeordneten Drei-Wege-Katalysator (6B).

3. Gerät nach Anspruch 1,

dadurch gekennzeichnet, daß

der NO_x-Absorbent (6A) einen Ba-Cu-O basierten Absorbenten umfaßt.

4. Gerät nach Anspruch 1,

dadurch gekennzeichnet, daß

die Betriebszustands-Erfassungseinrichtung einen Motordrehzahlsensor (14) und einen Motorlastsensor (12) umfaßt.

5. Gerät nach Anspruch 1,

dadurch gekennzeichnet, daß

die Betriebszustands-Bestimmungseinrichtung bestimmt, daß die Abgas- oder NO_x-Absorbiententemperatur hoch ist, wenn die Abgastemperatur höher als 550 °C oder die NO_x-Absorbiententemperatur höher als 500 °C ist.

6. Gerät nach Anspruch 1,

dadurch gekennzeichnet, daß

die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum wiederholten Verringern der Abgas-Sauerstoffkonzentration enthält, indem die Treibstoffeinspritzung so gesteuert wird, daß die Sauerstoffkonzentration des Abgases wiederholt verringert wird.

23

EP 0 580 389 B1

24

7. Gerät nach Anspruch 6,
dadurch gekennzeichnet, daß
die die Abgas-Sauerstoffkonzentration wiederholt verringernde Einrichtung eine Einrichtung zum Steuern der Treibstoffeinspritzung enthält, so daß eine Sequenz eines Betriebs bei magerem Luft-Treibstoff-Verhältnis für eine erste Zeitperiode, gefolgt von einem Betrieb bei einem fetten Luft-Treibstoff-Verhältnis für eine zweite Zeitperiode wiederholt durchgeführt wird. 5
8. Gerät nach Anspruch 7,
dadurch gekennzeichnet, daß
die erste Zeitperiode etwa 2 Minuten beträgt und die zweite Zeitperiode etwa 3 Sekunden beträgt. 10
9. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung enthält, um die Abgas-Sauerstoffkonzentration kontinuierlich zu verringern, um die Abgas-Sauerstoffkonzentration zu verringern und die verringerte Sauerstoffkonzentration für eine vorbestimmte Zeitperiode beizubehalten. 15
10. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Treibstoffabschaltungs-Aussetzeinrichtung zum Aussetzen der Treibstoffabschaltung enthält, wenn das Abgas Überschuß-Sauerstoff enthält, und die Abgastemperatur oder die NO_x-Absorbiententemperatur hoch ist. 20
11. Gerät nach Anspruch 10,
dadurch gekennzeichnet, daß
der Zustand, in dem die Treibstoffabschaltung durchzuführen ist, ein Verzögerungszustand ist. 25
12. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Betriebszustands-Bestimmungseinrichtung eine Einrichtung zum Bestimmen, ob die derzeitige Abgastemperatur oder die NO_x-Absorbiententemperatur innerhalb eines vorbestimmten Temperaturbereiches ist, und daß die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung die Sauerstoffkonzentration nur verringert, wenn die derzeitige Abgastemperatur oder die NO_x-Absorbiententemperatur innerhalb des vorbestimmten Temperaturbereiches ist. 30
13. Gerät nach Anspruch 12,
dadurch gekennzeichnet, daß
der vorbestimmte Temperaturbereich ein Bereich von 550 °C bis 750 °C für die Abgastemperatur und ein Bereich von 500 °C bis 700 °C für die NO_x-Absorbiententemperatur ist. 35
14. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Betriebszustands-Bestimmungseinrichtung eine Einrichtung zum Bestimmen, ob die derzeitige Abgastemperatur oder die NO_x-Absorbiententemperatur innerhalb eines vorbestimmten Temperaturbereiches ist, und daß die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum Verzögern eines Soll-Zündzeitpunkts enthält, wenn die derzeitige Abgastemperatur oder die NO_x-Absorbiententemperatur innerhalb des vorbestimmten Temperaturbereiches ist. 40
15. Gerät nach Anspruch 14,
dadurch gekennzeichnet, daß
der vorbestimmte Temperaturbereich ein Bereich von 550 °C bis 750 °C für die Abgastemperatur und ein Bereich von 500 °C bis 700 °C für die NO_x-Absorbiententemperatur ist. 45
16. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Betriebszustands-Erfassungseinrichtung einen Fahrzeuggeschwindigkeitssensor (18) enthält, und daß die Betriebszustands-Bestimmungseinrichtung eine Einrichtung enthält, um zu bestimmen, ob eine Abgas- oder NO_x-Absorbiententemperatur hoch ist oder nicht, indem bestimmt wird, ob eine derzeitige von dem Fahrzeuggeschwindigkeitssensor (18) erfaßte Fahrzeuggeschwindigkeit zumindest so groß wie eine vorbestimmte Geschwindigkeit ist. 50
17. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die vorbestimmte Geschwindigkeit etwa 100 km/h beträgt. 55
18. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum Modifizieren einer Bezugstemperatur zum Umschalten eines Motorbetriebs von einem Betrieb bei einem magerem Luft-Treibstoff-Verhältnis zu einem Betrieb bei einem fetten Luft-Treibstoff-Verhältnis enthält, so daß die Bezugstempera-

25

EP 0 580 389 B1

26

tur um so höher ist, je höher die Temperaturen waren, denen der NO_x-Absorbent (6, 6A) ausgesetzt war.

19. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum Verringern der Abgas-Sauerstoffkonzentration enthält, um ein Ansteigen der NO_x-Absorbientemperatur zu erlauben, wenn die NO_x-Absorbientemperatur eine vorbestimmte Temperatur überschreitet, Speichern der höchsten Temperatur, der der NO_x-Absorbent ausgesetzt ist, und Aussetzen der Funktion des Verringerens der Abgas-Sauerstoffkonzentration, wenn die NO_x-Absorbientemperatur sich auf eine Temperatur verringert, die um eine vorbestimmte Temperaturdifferenz niedriger ist als die gespeicherte höchste Temperatur.

20. Gerät nach Anspruch 19,
dadurch gekennzeichnet, daß
die vorbestimmte Temperatur etwa 500 °C beträgt und die vorbestimmte Temperaturdifferenz etwa 50 °C beträgt.

21. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum Aussetzen eines Motorbetriebs bei mageren Luft-Treibstoff-Verhältnissen und zum Anhalten des Aussetzens des Betriebs bei dem mageren Luft-Treibstoff-Verhältnis unabhängig von einer NO_x-Absorbientemperatur enthält, wenn eine vorbestimmte Zeitperiode vergangen ist, seit der Betrieb bei dem mageren Luft-Treibstoff-Verhältnis ausgesetzt wurde.

22. Gerät nach Anspruch 21,
dadurch gekennzeichnet, daß
die vorbestimmte Zeitperiode etwa zehn Minuten beträgt.

23. Gerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Betriebszustands-Erfassungseinrichtung eine Einrichtung (10) zum Erfassen einer Einlaßgastemperatur des NO_x-Absorbienten und eine Einrichtung (10A) zum Erfassen einer Auslaßgastemperatur des NO_x-Absorbienten (6, 6A) enthält, und daß die Abgas-Sauerstoffkonzentrations-Steuerungseinrichtung eine Einrichtung zum Verringern der Abgas-Sauerstoffkonzentration enthält, wenn die Auslaßgastemperatur des NO_x-Absorbienten (6, 6A) eine erste vorbestimmte Temperatur überschreitet, und

daß der Vorgang des Verringerens der Abgas-Sauerstoffkonzentration gestoppt wird, wenn die Einlaßgastemperatur des NO_x-Absorbienten (6, 6A) sich auf eine Temperatur unterhalb einer zweiten vorbestimmten Temperatur verringert, wobei die zweite vorbestimmte Temperatur geringer als die erste vorbestimmte Temperatur ist.

24. Gerät nach Anspruch 23,
dadurch gekennzeichnet, daß
die Einrichtung zum Erfassen einer Auslaßgastemperatur des NO_x-Absorbienten einen Temperatursensor (10A) umfaßt, der unterstromig des NO_x-Absorbienten (6, 6A) angeordnet ist.

25. Gerät nach Anspruch 23,
dadurch gekennzeichnet, daß
die erste vorbestimmte Temperatur etwa 500 °C beträgt und die zweite vorbestimmte Temperatur etwa 400 °C beträgt.

Revendications

1. Dispositif d'épuration de gaz d'échappement pour moteur à combustion comprenant :
un moteur (2) à combustion interne pouvant effectuer la combustion d'un carburant avec des rapports air-carburant pauvres et un tuyau (4) d'échappement relié au moteur (2);
un absorbant (6, 6A) de NO_x installé dans le tuyau (4) d'échappement et comportant au moins un élément sélectionné dans le groupe constitué de métaux alcalino-terreux, de terres rares et alcalins, et d'oxydes de métaux alcalino-terreux, de terres rares et alcalins, l'absorbant (6, 6A) de NO_x absorbant le NO_x présent dans le gaz d'échappement qui contient un excès d'oxygène et libérant le NO_x que l'absorbant (6, 6A) a absorbé lorsque la concentration en oxygène du gaz d'échappement diminue; et
un moyen (10, 10A, 12, 14, 18) de détection de condition de fonctionnement pour détecter une condition de fonctionnement du moteur (2),
caractérisé en ce que ledit dispositif d'épuration de gaz d'échappement comprend en outre :
un moyen de détermination de condition de fonctionnement pour déterminer si le gaz d'échappement contient un excès d'oxygène et pour déterminer si l'une de la température de gaz d'échappement et de la température de l'absorbant de NO_x est élevée; et
un moyen de commande de la concentration en oxygène du gaz d'échappement pour réduire la concentration en oxygène du gaz

27

EP 0 580 389 B1

28

- d'échappement s'écoulant dans l'absorbant (6, 6A) de NOx lorsque le moyen de détermination de condition de fonctionnement détermine que le gaz d'échappement contient un excès d'oxygène et que l'une de la température du gaz d'échappement et de la température de l'absorbant de NOx est élevée.
2. Dispositif selon la revendication 1, comprenant en outre un catalyseur (6B) à trois voies installé dans le tuyau (4) d'échappement en aval de l'absorbant (6A) de NOx.
 3. Dispositif selon la revendication 1, dans lequel l'absorbant (6A) de NOx comprend un absorbant à base de Ba-Cu-O.
 4. Dispositif selon la revendication 1, dans lequel le moyen de détection de condition de fonctionnement comporte un capteur (14) de vitesse du moteur et un capteur (12) de charge du moteur.
 5. Dispositif selon la revendication 1, dans lequel le moyen de détermination de condition de fonctionnement détermine que la température du gaz d'échappement ou de l'absorbant de NOx est élevée lorsque la température du gaz d'échappement est supérieure à 550 °C ou lorsque la température de l'absorbant de NOx est supérieure à 500 °C.
 6. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour faire décroître de façon répétée la concentration en oxygène du gaz d'échappement en commandant l'injection de carburant pour faire décroître de façon répétée la concentration en oxygène du gaz d'échappement.
 7. Dispositif selon la revendication 6, dans lequel le moyen pour faire décroître de façon répétée la concentration en oxygène du gaz d'échappement comporte un moyen pour commander l'injection de carburant de façon à répéter une séquence d'un fonctionnement à rapport air-carburant pauvre pendant une première période, suivi d'un fonctionnement à rapport air-carburant riche pendant une seconde période.
 8. Dispositif selon la revendication 7, dans lequel la première période est d'environ deux minutes et la seconde période est d'environ trois secondes.
 9. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour faire décroître de façon continue la concentration en oxygène du gaz d'échappement afin de faire décroître la concentration en oxygène du gaz d'échappement et de maintenir une concentration réduite en oxygène pendant une période prédéterminée.
 10. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement Comporte un moyen pour faire cesser la coupure d'alimentation en carburant pour cesser de couper l'alimentation en carburant lorsque le gaz d'échappement contient un excès d'oxygène et lorsque l'une de la température du gaz d'échappement et de la température de l'absorbant de NOx est élevée.
 11. Dispositif selon la revendication 1, dans lequel la condition dans laquelle la coupure de l'alimentation en carburant doit être effectuée est une condition de décélération.
 12. Dispositif selon la revendication 1, dans lequel le moyen de détermination de condition de fonctionnement comporte un moyen pour déterminer si l'une de la température courante du gaz d'échappement et de la température courante de l'absorbant de NOx se situe dans un intervalle prédéterminé de températures, et dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement ne fait décroître la concentration en oxygène que lorsque l'une de la température courante du gaz d'échappement et de la température courante de l'absorbant de NOx se situe dans l'intervalle prédéterminé de températures.
 13. Dispositif selon la revendication 12, dans lequel l'intervalle prédéterminé de températures est un intervalle de 550 °C-750 °C pour la température du gaz d'échappement et de 500 °C-700 °C pour la température de l'absorbant de NOx.
 14. Dispositif selon la revendication 1, dans lequel le moyen de détermination de condition de fonctionnement comporte un moyen pour déterminer si l'une de la température courante du gaz d'échappement et de la température courante de l'absorbant de NOx se situe dans un intervalle prédéterminé de températures, et dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour retarder l'ins-

29

EP 0 580 389 B1

30

tant d'allumage cible lorsque l'une de la température courante du gaz d'échappement et de la température courante de l'absorbant de NOx se situe dans l'intervalle prédéterminé de températures.

15. Dispositif selon la revendication 14, dans lequel l'intervalle prédéterminé de températures est un intervalle de 550 °C-750 °C pour la température du gaz d'échappement et un intervalle de 500 °C-700 °C pour la température de l'absorbant de NOx.

16. Dispositif selon la revendication 1, dans lequel le moyen de détection de condition de fonctionnement comporte un capteur (18) de vitesse du véhicule et dans lequel le moyen de détermination de condition de fonctionnement comporte un moyen pour déterminer si la température du gaz d'échappement ou de l'absorbant de NOx est ou non élevée en déterminant si la vitesse courante du véhicule détectée par le capteur (18) de vitesse du véhicule est au moins aussi grande qu'une vitesse prédéterminée.

17. Dispositif selon la revendication 1, dans lequel la vitesse prédéterminée est d'environ 100 km/h.

18. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour modifier une température de référence pour faire passer le fonctionnement du moteur d'un fonctionnement à rapport air-carburant pauvre à un fonctionnement à rapport air-carburant riche de telle sorte que plus la température de l'absorbant (6, 6A) de NOx est élevée, plus la température de référence est élevée.

19. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour faire décroître la concentration en oxygène du gaz d'échappement pour permettre une augmentation de la température de l'absorbant de NOx lorsque la température de l'absorbant de NOx dépasse une température prédéterminée, pour mémoriser la température la plus élevée que l'absorbant de NOx a présenté, et pour interrompre l'opération d'abaissement de la concentration en oxygène du gaz d'échappement lorsque la température de l'absorbant de NOx subit une décroissance de température prédéterminée jusqu'à une température inférieure à la température la plus élevée

vée mémorisée.

20. Dispositif selon la revendication 19, dans lequel la température prédéterminée est d'environ 550 ° et la décroissance prédéterminée de la température est d'environ 50 °C.

21. Dispositif selon la revendication 1, dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour cesser de faire fonctionner le moteur pour des rapports air-carburant pauvres et pour interrompre la cessation du fonctionnement à rapport air-carburant pauvre indépendamment de la température de l'absorbant de NOx lorsqu'une période prédéterminée s'est écoulée depuis que le fonctionnement à rapport air-carburant pauvre a cessé.

22. Dispositif selon la revendication 21, dans lequel la période prédéterminée est d'environ dix minutes.

23. Dispositif selon la revendication 1, dans lequel le moyen de détection de condition de fonctionnement comporte un moyen pour détecter la température de gaz d'entrée de l'absorbant de NOx et un moyen (10A) pour détecter la température de gaz de sortie de l'absorbant (6, 6A) de NOx, et dans lequel le moyen de commande de la concentration en oxygène du gaz d'échappement comporte un moyen pour faire décroître la concentration en oxygène du gaz d'échappement lorsque la température de gaz de sortie de l'absorbant (6, 6A) de NOx dépasse une première température prédéterminée, et dans lequel l'opération d'abaissement de la concentration en oxygène du gaz d'échappement est interrompue lorsque la température de gaz d'entrée de l'absorbant (6, 6A) de NOx décroît jusqu'à une température inférieure à une seconde température prédéterminée, la seconde température prédéterminée étant inférieure à la première température prédéterminée.

24. Dispositif selon la revendication 23, dans lequel le moyen pour détecter la température de gaz de sortie de l'absorbant de NOx comprend un capteur (10A) de température installé en aval de l'absorbant (6, 6A) de NOx.

25. Dispositif selon la revendication 23, dans lequel la première température prédéterminée est d'environ 500 °C et la seconde température prédéterminée est d'environ 400 °C.

EP 0 580 389 B1

FIG 1


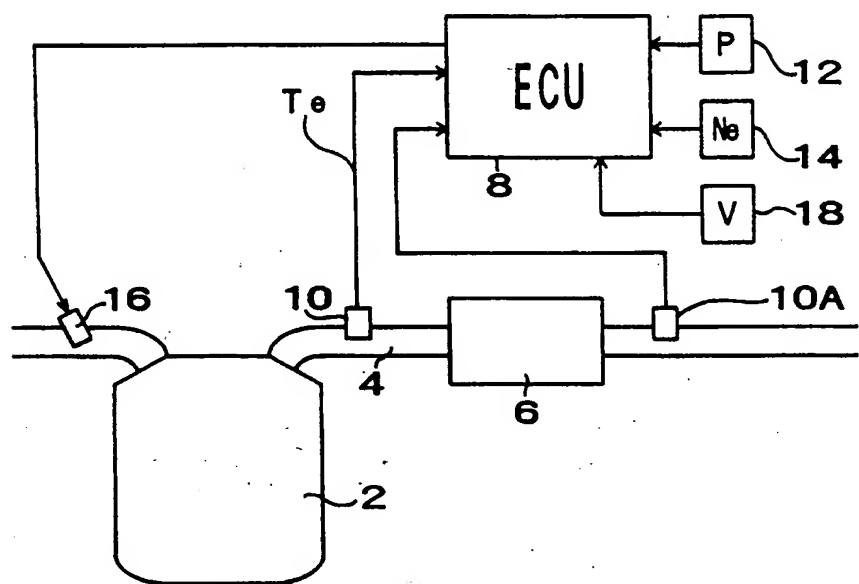


FIG 2

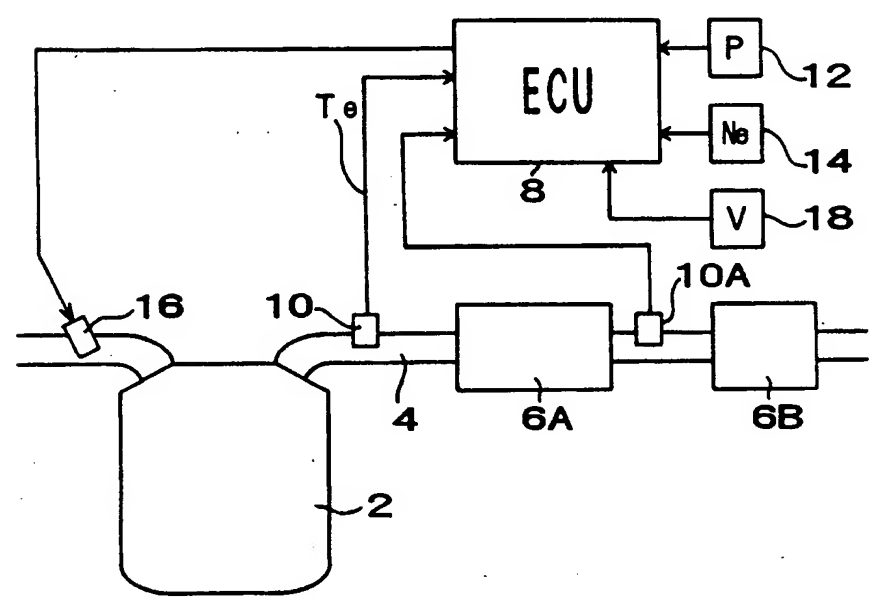

EP 0 580 389 B1

FIG. 3



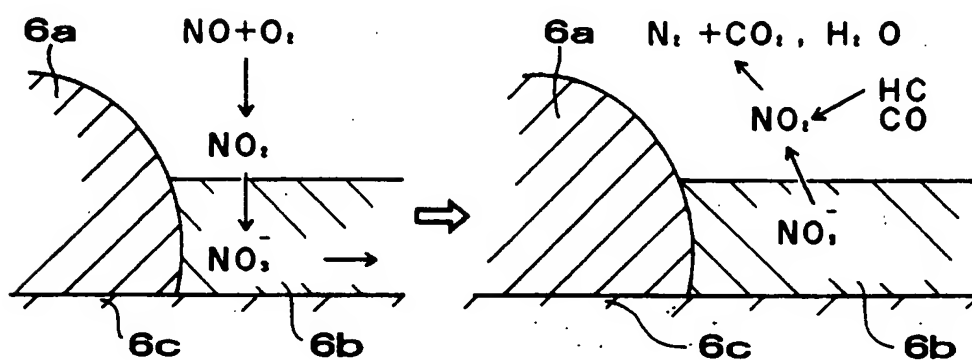


FIG. 4

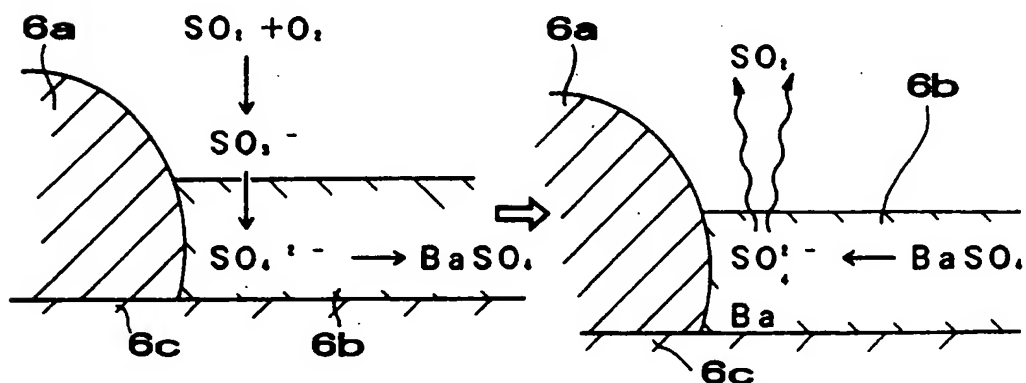


EP 0 580 389 B1

FIG. 5

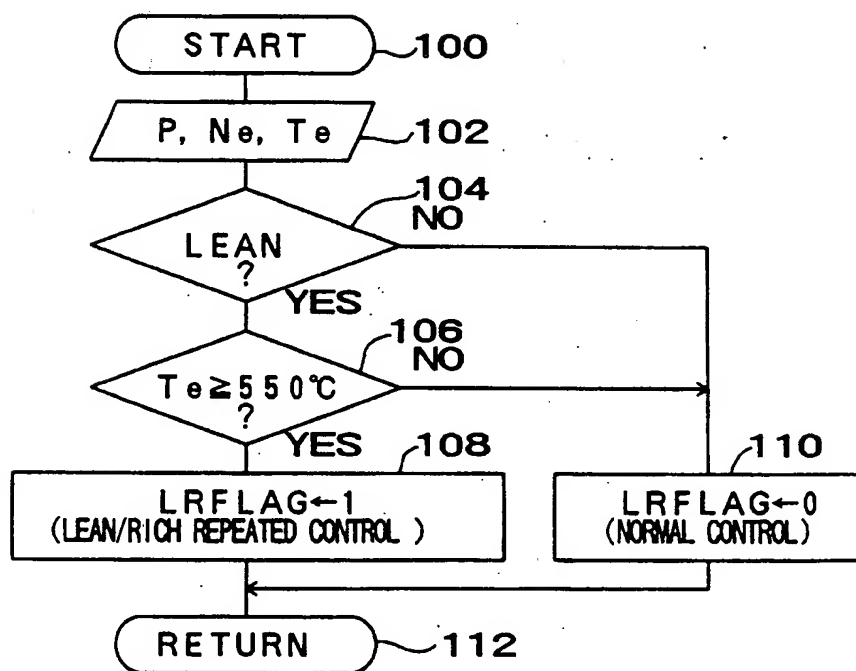


EP 0 580 389 B1

FIG. 6

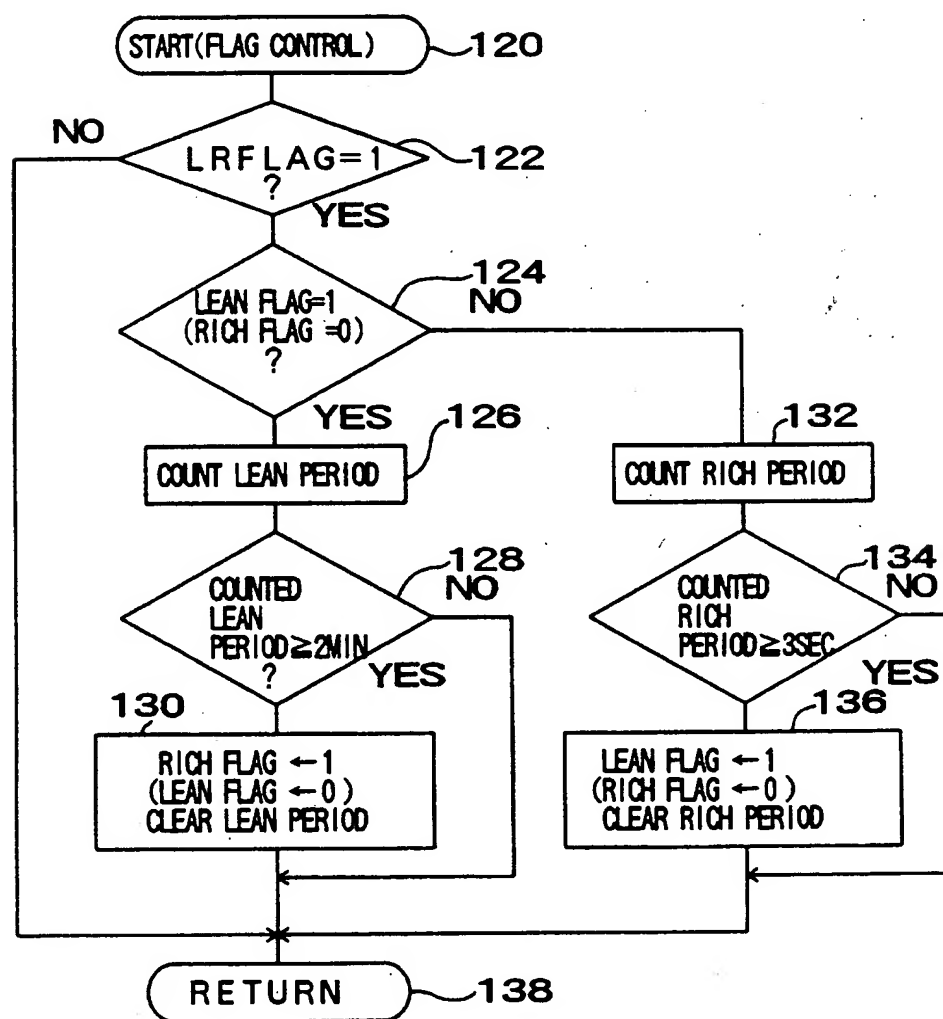


EP 0 580 389 B1

FIG. 7

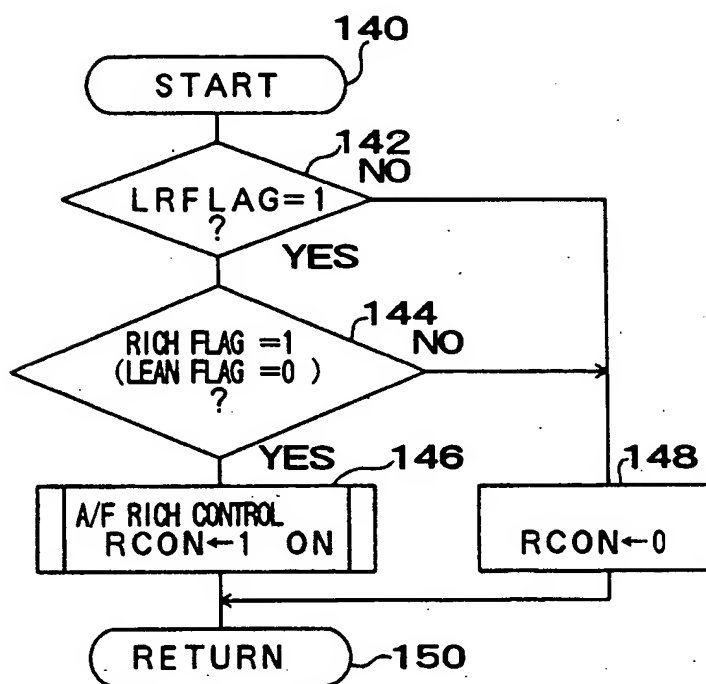


EP 0 580 389 B1

FIG. 8

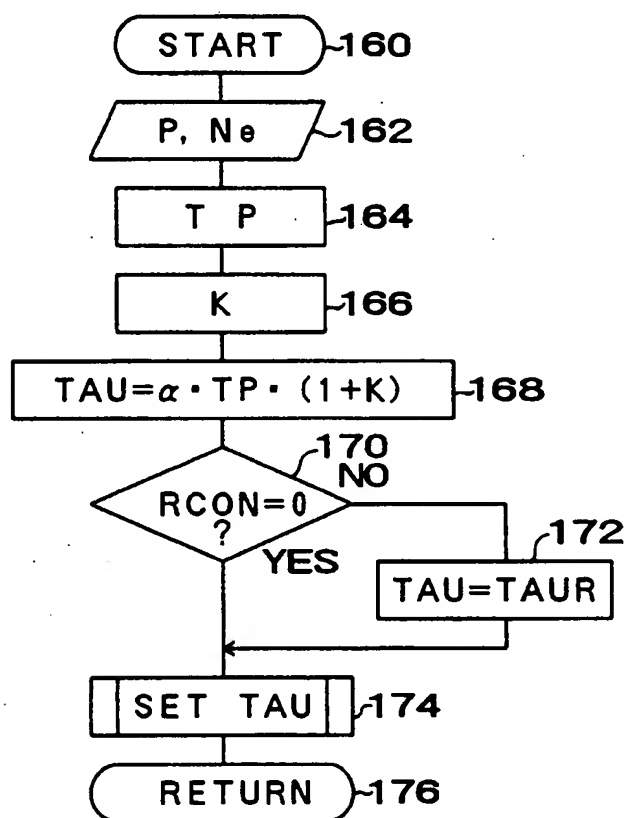


EP 0 580 389 B1

FIG. 9

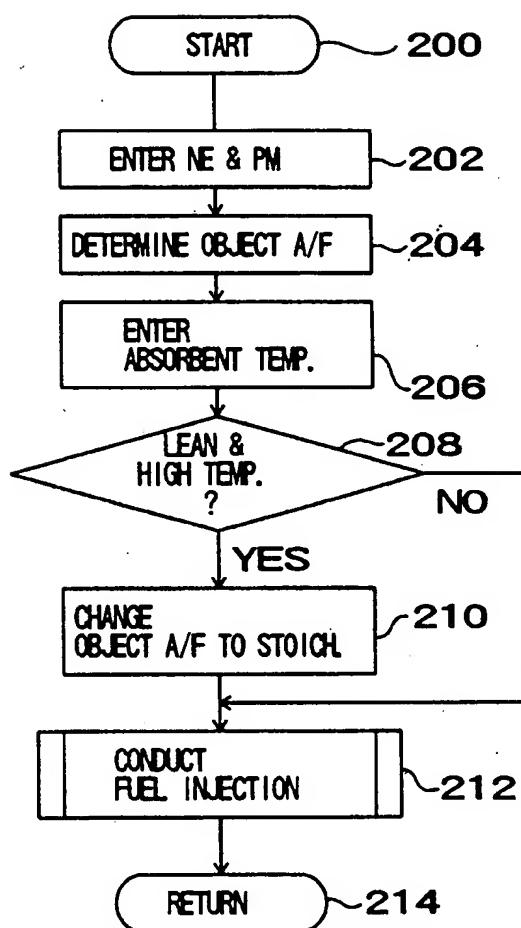


EP 0 580 389 B1

FIG. 10

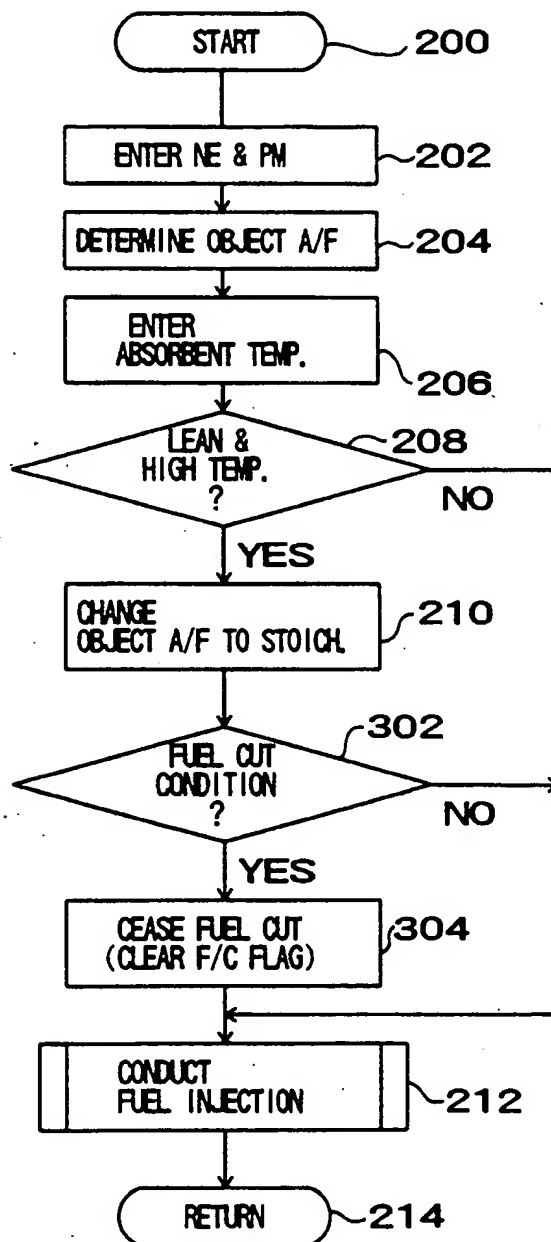


EP 0 580 389 B1

FIG 11

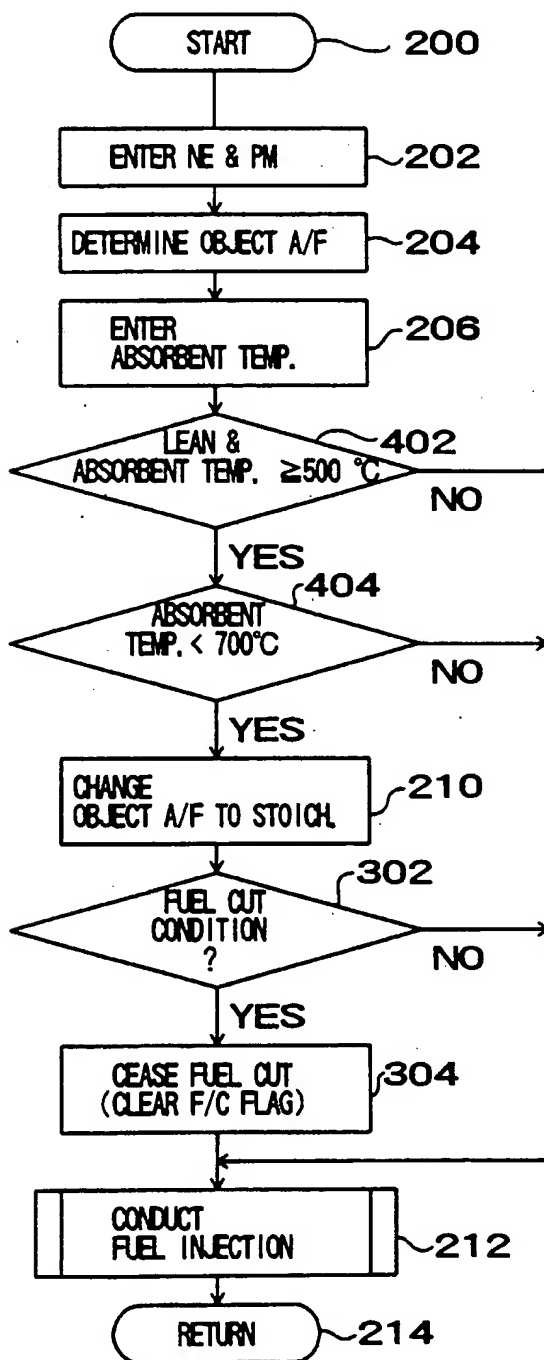


EP 0 580 389 B1

FIG 12

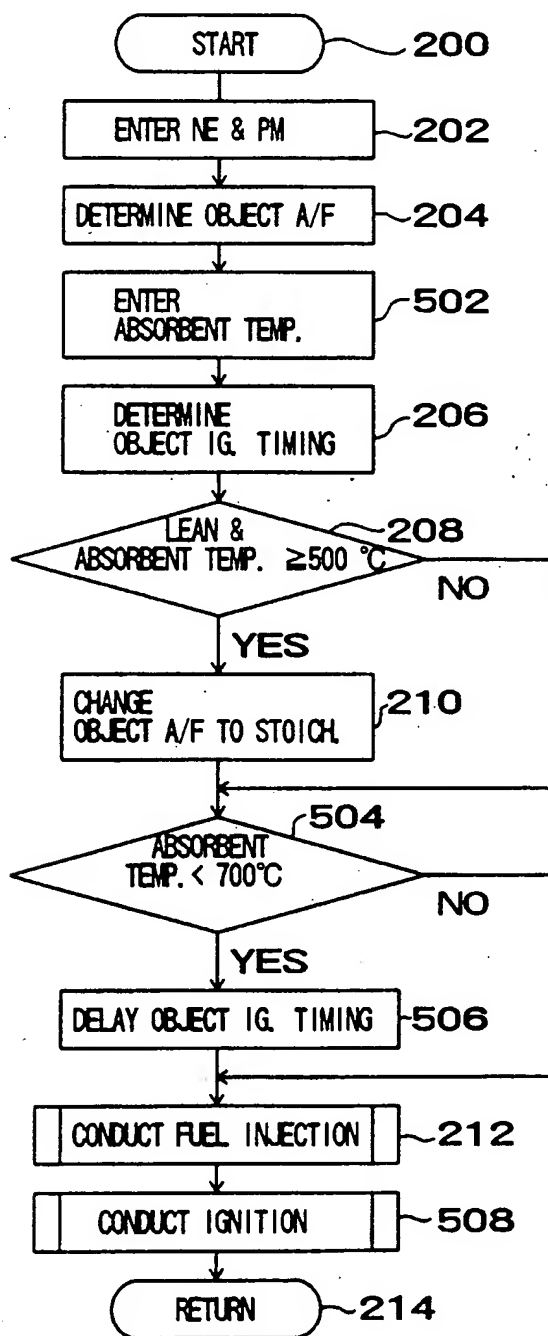


EP 0 580 389 B1

FIG. 13

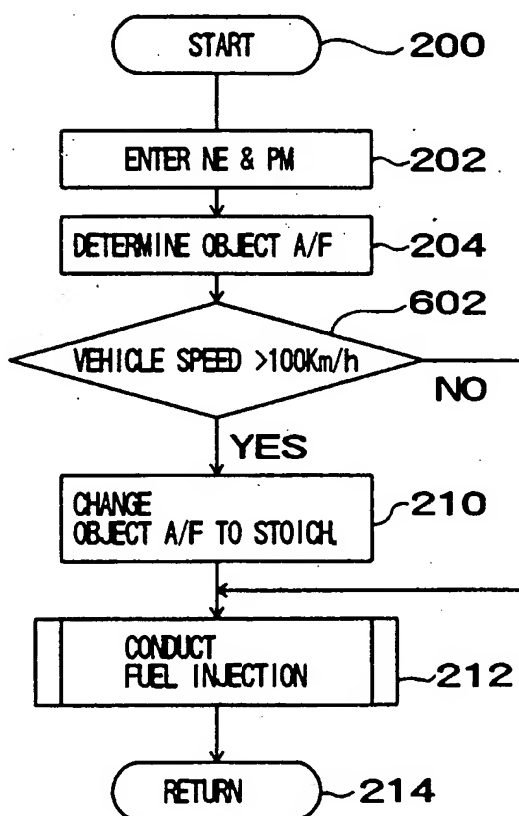


EP 0 580 389 B1

FIG. 14

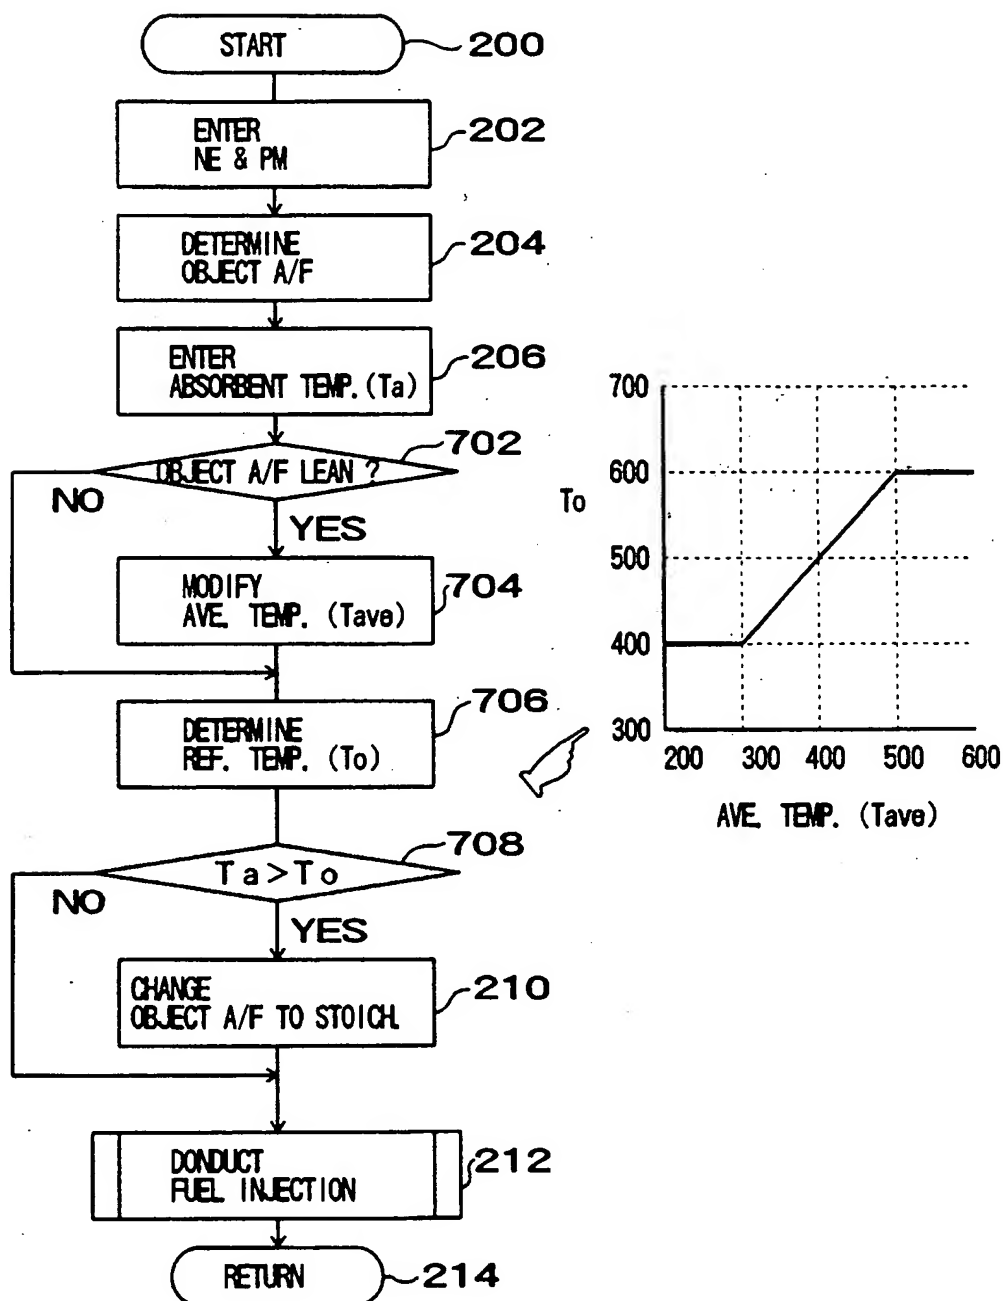


EP 0 580 389 B1

FIG 15

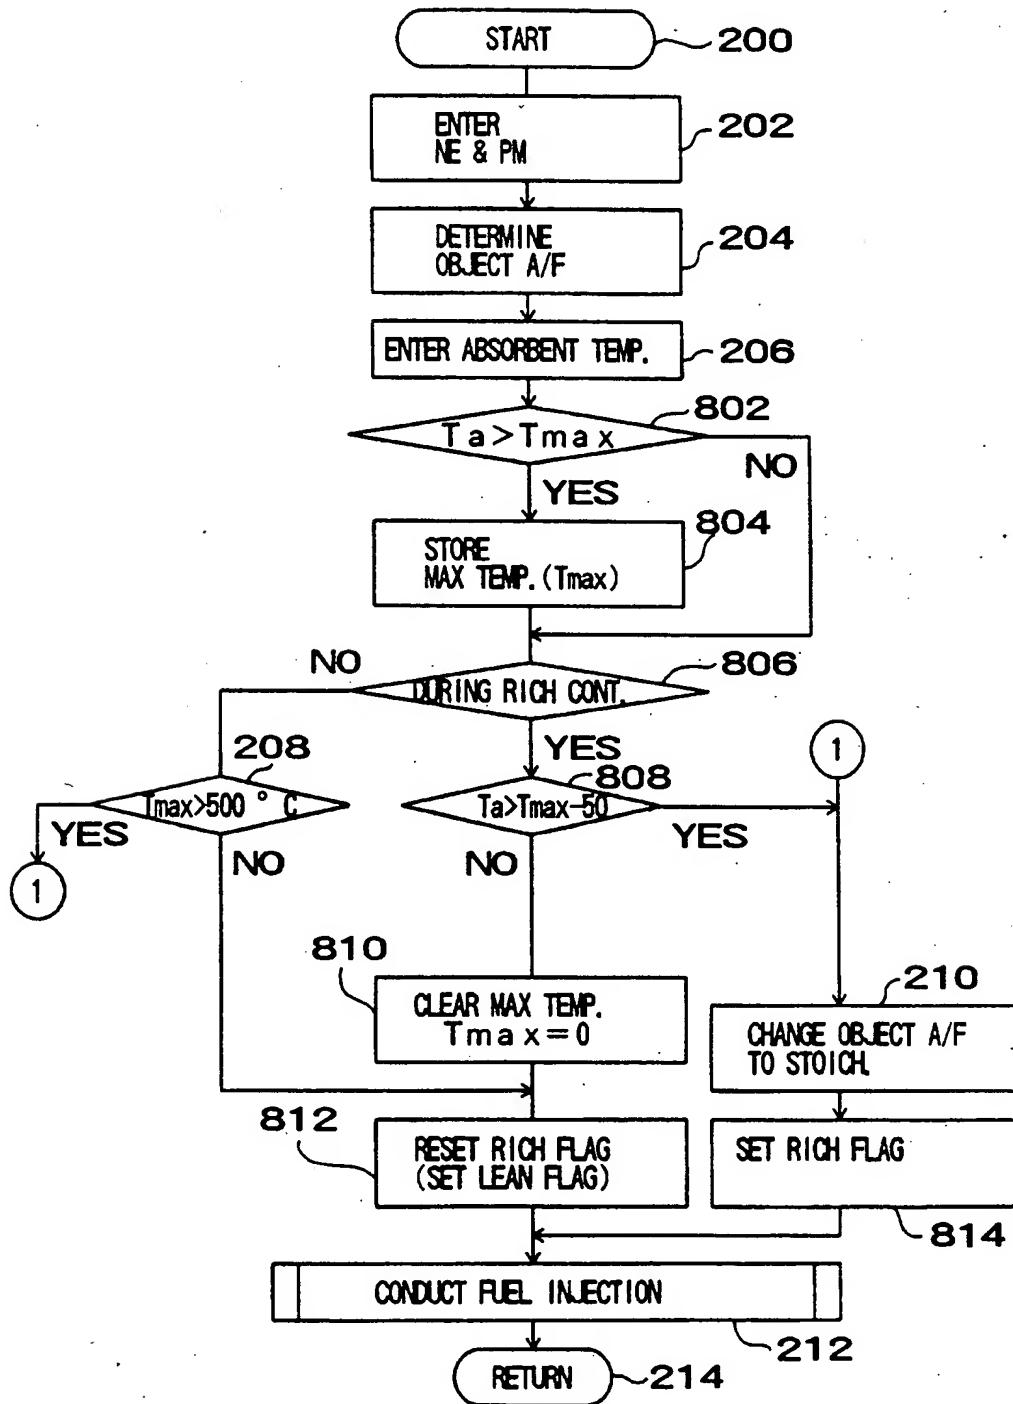

EP 0 580 389 B1

FIG 16

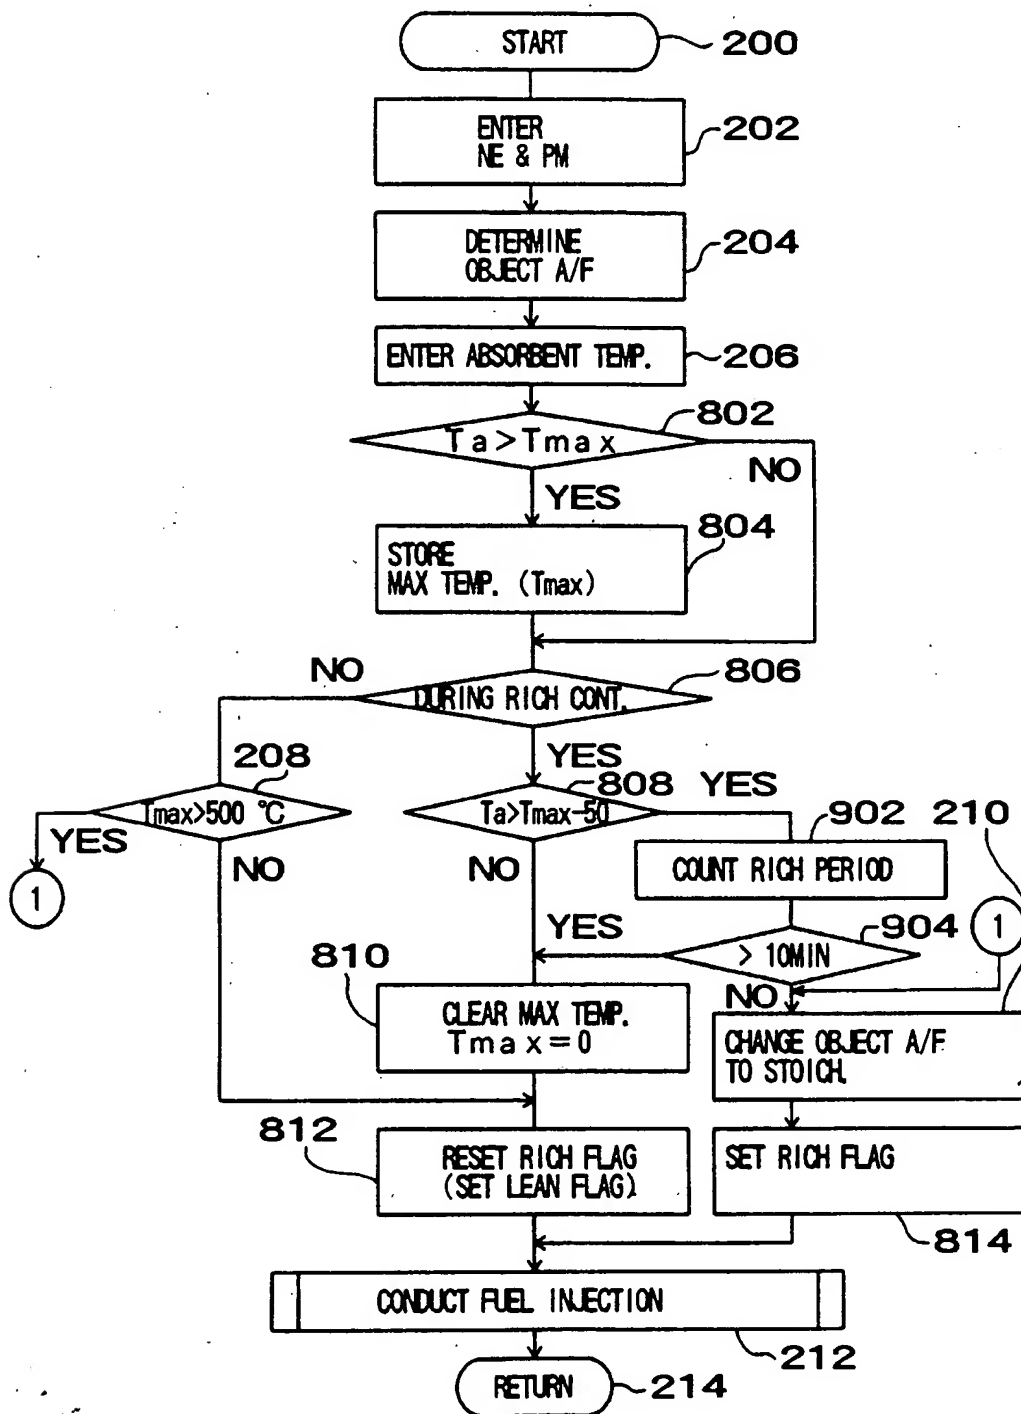

EP 0 580 389 B1

FIG. 17

